

DELPHION

Log Out

Work Files

Saved Searches

RESEARCH

IPRODUCTS

INSIDE DELPHION

My Account

Search: Quick/Number Boolean Advanced Derwent

Help

No active trail

Select OR

Stop Tracking

The Delphion Integrated View

Get Now: ☒ PDF | [File History](#) | [Other choices](#)

Tools: Add to Work File: Create new Work File

View: [INPADOC](#) | Jump to: Top

☒ Email this to a friend

⌘ Title: JP2002161623A2: EXTERNAL-FACING BACKING STRUCTURE AND EXTERNAL-FACING BACKING CONSTRUCTION METHOD

⌘ Derwent Title: Exterior foundation structure in building, has wall to support cement board layer whose outer surface is coated with cement mortar [\[Derwent Record\]](#)

⌘ Country: JP Japan
⌘ Kind: A2 Document Laid open to Public inspection
⌘ Inventor: HIROSHIGE RYOICHI;
ITO YOSHIMITSU;
⌘ Assignee: MITSUI HOME CO LTD
MITSUBISHI RAYON CO LTD
[News, Profiles, Stocks and More about this company](#)

⌘ Published / Filed: 2002-06-04 / 2000-11-27


⌘ Application Number: JP20000000359862

⌘ IPC Code: IPC-7: [E04F 13/02](#); [E04B 1/70](#); [E04B 2/56](#);

⌘ Priority Number: 2000-11-27 JP20000000359862

⌘ Abstract: PROBLEM TO BE SOLVED: To propose a quite new semi-drying and semi-wet type external facing backing structure in which not only design properties, maintainability and reproducibility but also workability and quality characteristics are improved.

SOLUTION: The external-facing backing structure contains a cement board layer 3 supported on the outside of an exterior-wall skeleton layer 1 and a cement mortar layer 4 applied on the external side face of the cement board layer 3. The cement board




[View](#)
[Image](#)
1 page

layer 3 is constituted by laying and arranging a plurality of cement boards 3a, 3a and the like in a plane shape, joints 3b are filled with cement mortar, and the cement board layer 3 is covered with a glass fiber net 4a from the outsides of the joints. Both surfaces of the cement board layer 3 are reinforced by the glass fiber nets, and irregularities are formed to the external side face of the cement board layer 3. A ventilation space layer 2 is formed between the exterior-wall skeleton layer 1 and the cement board layer 3.

COPYRIGHT: (C)2002,JPO

Family: None

Other Abstract Info: [DERABS G2002-523534](#)




[Nominate this for the Gallery...](#)




Copyright © 1997-2006 The Thomson Corporation
[Subscriptions](#) | [Web Seminars](#) | [Privacy](#) | [Terms & Conditions](#) | [Site Map](#) | [Contact Us](#) | [Help](#)


【図1】

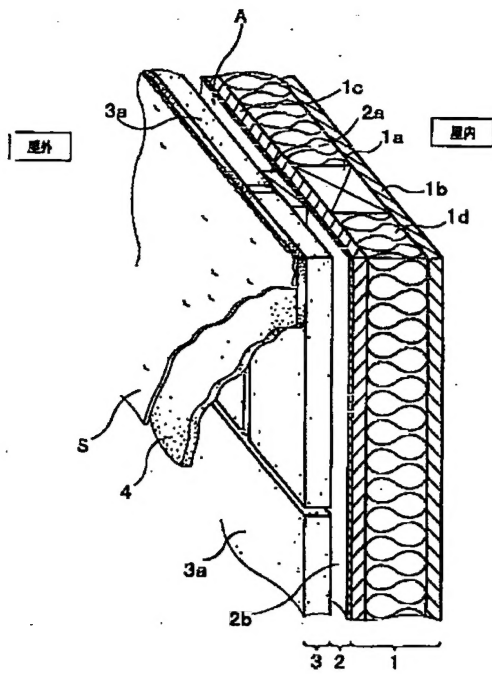


【図2】

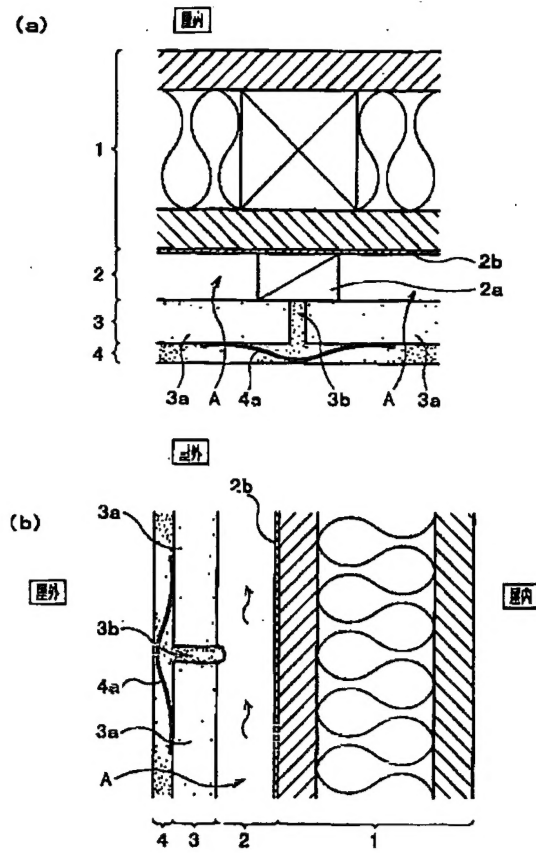


【図3】

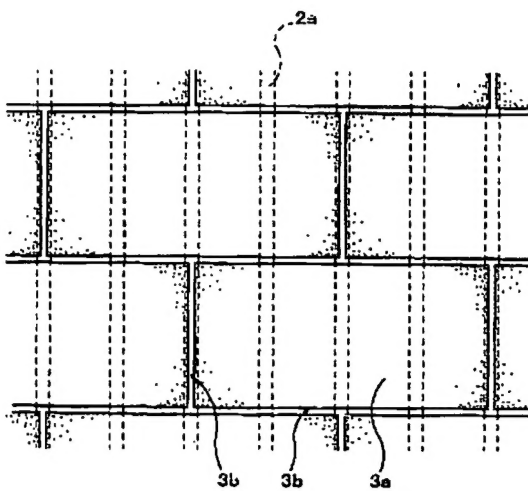


【図4】

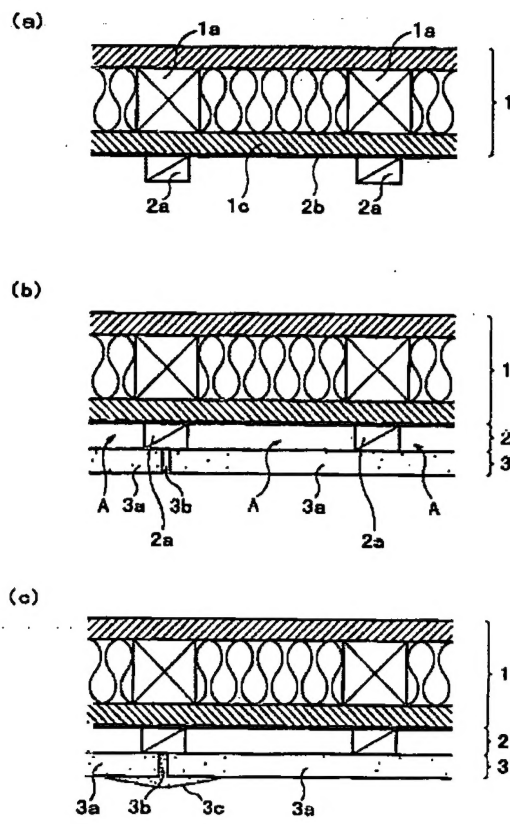


【図5】

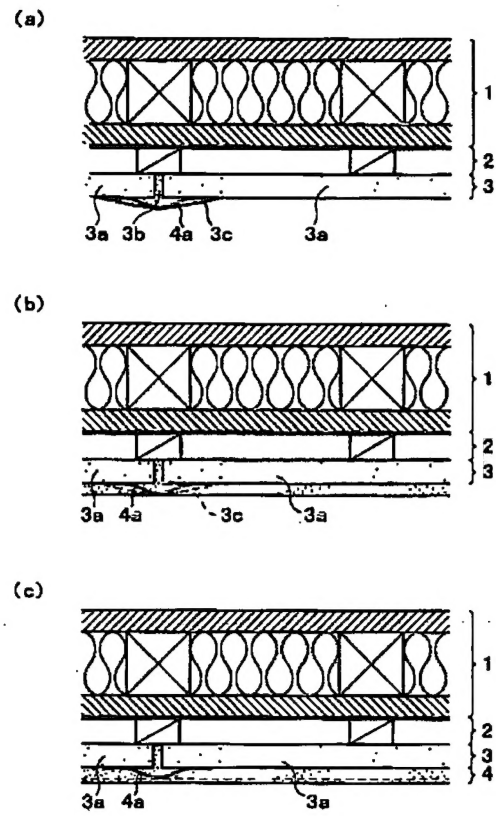


【図6】

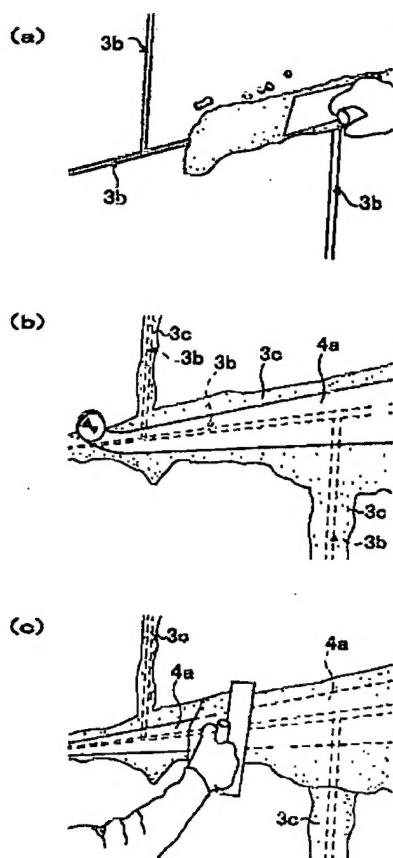

【図7】

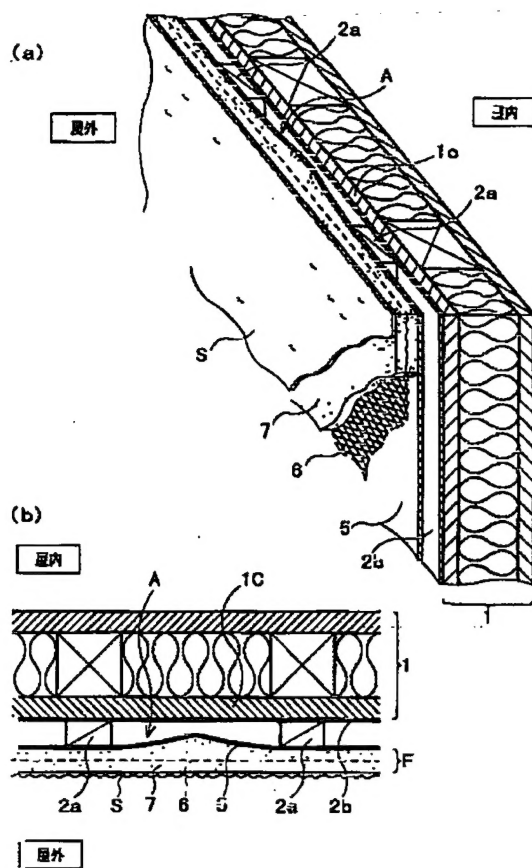

【図8】

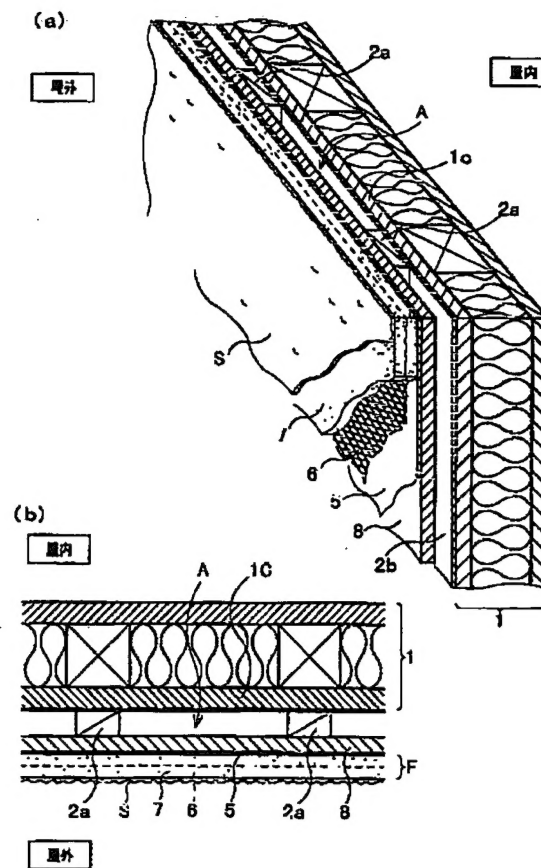

フロントページの続き

(72)発明者 伊藤 義充
東京都港区港南一丁目6番41号 品川クリ
スタルスケア 三菱レイヨン株式会社内

Fターム(参考) 2E001 DB02 DB05 DE01 EA09 FA04
GA10 GA12 GA32 HA01 HA33
LA10 LA16 NA07 NC01 ND12
2E002 EB12 FB05 GA06 MA06 MA27
MA28 MA36